

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
30 October 2003 (30.10.2003)

PCT

(10) International Publication Number  
**WO 03/090336 A1**

- (51) International Patent Classification<sup>7</sup>: **H02M 1/15**
- (21) International Application Number: **PCT/DK03/00260**
- (22) International Filing Date: **16 April 2003 (16.04.2003)**
- (25) Filing Language: **Danish**
- (26) Publication Language: **English**
- (30) Priority Data:  
PA2002 00581 19 April 2002 (19.04.2002) DK  
PA2002 00589 19 April 2002 (19.04.2002) DK  
PA2002 00595 19 April 2002 (19.04.2002) DK
- (71) Applicant (for all designated States except US): **LINAK A/S [DK/DK]; Smedevænget 8, Guderup, DK-6430 Nordborg (DK).**
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BASTHOLM, Jeppe [DK/DK]; Bækgade 3, Blans, DK-6400 Sønderborg (DK).**
- (74) Agent: **LINAK A/S; Patent Department, P.O. Box 238, DK-9100 Aalborg (DK).**
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), DE (utility model), DK (utility model), DM, DZ, EC, EE (utility model), ES, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **A DRIVE UNIT, PREFERABLY AN ACTUATOR, A CONTROL AND A CONSTRUCTION**

(57) Abstract: In particular in articles of furniture having at least an element which may be adjusted with a DC motor, preferably via a mechanical transmission, it is desirable to have a level of acoustic noise as low as possible. The power supply to the DC motor is based on a transformer with rectification and smoothing. With the invention it has surprisingly been found that the level of acoustic noise may be reduced significantly in that the secondary side of the transformer has a first control to compensate for the loss in the motor, thereby keeping the speed thereof constant for a long period of time, and a second control adapted to remove the ripple in the voltage, thereby keeping the speed of the motor constant for a short period of time.

WO 03/090336 A1

**A drive unit, preferably an actuator, as well as a control and a structure**

5 The present invention relates to a drive unit, preferably an actuator as stated in the introductory portion of claim 1. The invention moreover relates to a control and a structure as defined in claims 5 and 6, respectively.

10 Actuators driven by a reversible low volt DC motor, typically 24V, are used for adjustable articles of furniture, such as beds, chair and tables. In a linear actuator, the motor, via a transmission, drives a spindle having a nut fixed against rotation so that the nut can move to and fro on the spindle depending on the direction of rotation of the spindle. The nut has arranged thereon a tubular rod whose free end is provided with an attachment for securing in the structure. Typically, the transmission simply consists of a worm gear, 15 where the worm is provided in an extension of the motor shaft and the worm wheel secured directly on the spindle. An example is disclosed in WO 02/29284 to Linak A/S. A special structure of linear actuators is called lifting columns, e.g. intended for table legs. Rotary actuators have so far not been as common as linear actuators in connection with furniture, but a single 20 example based on a specially constructed planetary gear is described in WO 01/17401 to Linak A/S. Also known are other forms of drive units constructed specifically for use in furniture. In the furniture business, the price of the actuators is a decisive factor, which has become particularly pronounced recently. This, of course, has resulted in a development toward simpler structures. Thus, it may be mentioned that for cost-reducing purposes the power supply is dimensioned in view of the circumstance that it is loaded only briefly when the article of furniture is adjusted. Or put differently, it is allowed to overload the power supply briefly. For example, in case of a height-adjustable table which may be adjusted from 650 mm to 25 1250 in the height, it takes 12 seconds to get from one extreme position to the other at a speed of 50 mm/sec. To avoid continuous overload operation, 30

running is just allowed for a given interval of time so that the power supply is not superheated.

5 Especially in the furniture business, a decisive aspect is the level of noise, and with a demand for less expensive actuators it is even more difficult to meet the requirement for low-level noise actuators.

10 During adjustment of the article of furniture mechanical noise occurs, such as transmission noise, noise in the suspension of the adjustable element, noise because of vibrations that propagate in the structure, etc. When the most powerful single sources of noise have been remedied, it is a complex noise picture that emerges, it being very difficult, if not impossible, to locate the individual sources of noise.

15 In case of furniture, the level of noise is a significant factor in the sense that this must be as low as possible. This applies to beds, including hospital beds and sickbeds, as well as armchairs and tables, including desks. In the furniture structure and in the drive unit, various common noise-reducing measures may be taken, such as the use of rubber/plastics suspensions, plastics bushings, lubricants, etc. to counteract the noise, but in spite of this  
20 it is still desirable to reduce the level of noise additionally.

25 Some of the noise originates from the motor, where part of the noise is caused by the structure of the rotor with axis-parallel air gaps between the iron flanges on which the coils are wound. This gives small, but noticeable discontinuities in the magnetic field that cause vibrations which propagate in the structure and cause acoustic noise. To obviate the discontinuity, it has been proposed to twist the armature so that the air gap is not axis-parallel. The phenomenon is described in another connection in US 4 616 151  
30 to General Motors Corporation.

Another part of the noise from the motor is caused by an axial movement of the rotor, which likewise results in vibrations and thereby acoustic noise. Owing to manufacturing tolerances it is difficult to do anything about the problem. The phenomenon is also described in another connection inter alia in US 5 497 039 to General Electric Company and in US 6 069 422 to Fasco Industries, Inc., both of which propose solutions for fixing the rotor in the axial direction via the magnetic fields of the stator.

Another aspect of the acoustic noise is the transmission noise, part of which originates from the engagement between the gear wheels or more particularly the varying degree of the engagement. In this context, reference may be made to WO 01/94732 A1 to VKR Holding A/S, which addresses noise problems in relation to window openers, focus being on noise caused by clearance between the components of the transmission, it being attempted to reduce the noise by controlled engagement between a worm and a worm wheel.

The outlined solutions are expensive and complicated or cannot readily be implemented in the present connection.

The invention is based on an ever increasing wish for reducing the noise level of linear actuators, bearing in mind that this must not lead to increased or appreciably increased costs of these.

By the invention it has surprisingly been found by chance that the general level of acoustic noise may be reduced significantly by purely electrical means. This is brought about according to the invention by constructing the drive unit stated in the introductory portion of claim 1 with a first control to compensate for the loss in the motor and with a second control adapted to remove variations in the voltage, thereby keeping the speed of the motor constant for a long period of time as well as for a short period of time.

There is no evident explanation to the phenomenon, but a possible explanation is that the reason is the reduction in the variation of the moment supplied by the motor, thereby producing a more constant engagement of the individual parts of the transmission. This, in turn, leads to smaller vibrations in the motor and the transmission as well as the structure as a whole, and thereby the acoustic noise is reduced.

It is possible to use various means for realizing the first control to compensate for the loss in the motor. Here, mention may be made indiscriminately of pseudo motors (used e.g. in WO 02/03526 to Linak A/S for synchronous running of two or more DC motors, where the principle in the pseudo motor is shown in fig. 3 and described on page 8, line 15 ff, hereby incorporated by reference in the present application), locking to commutator noise, generators having a predetermined frequency and control loop or Hall sensors. With the finding of the invention it is within the skills of a person skilled in the field to apply these solutions and similar solutions to achieve the intended effect.

A particularly favourable embodiment of the second control adapted to remove the ripple in the voltage is characterized in that the smoothing is performed by the following two steps, viz. a forward step and a power step, where the forward step may be described as the input voltage  $V_{in}$  from the rectification and a constant which is given by the actual embodiment of the circuits for the two steps. The power step may be described by its output voltage  $V_{out}$  and the input voltage  $V_{in}$  and the duty cycle which is the proportional time for which the power supply may be loaded during a given period of time. The result of the two steps gives  $V_{out}=k$ , i.e. the smoothed voltage is constant. This structure is entirely or practically entirely free of ripple voltage and simultaneously has a high efficiency and is moreover simple and inexpensive.

When long and short periods of time are mentioned, this should of course be seen in relation to the given adjustments, where an example of a long period of time is 30 msec. to 1 sec., while a short period of time is less than 10 msec., viz. the reciprocal of 100 Hz.

5

With the finding of the invention it is realized that the second control may basically consist of a capacitor having a great capacity exclusively with the purpose of removing variations in the voltage. This is a simple solution having a high efficiency, but the price is high, and ripple is not removed entirely. In addition, the physical size of the capacitor is a problem.

10

Another possibility is a linear control which is characterized by a low-cost, ripple-free and simple structure, but the power loss is quite great.

15

A further possibility is switch mode, which is favourable in that it is ripple-free and has a high efficiency. However, the structure is complex and the price is high.

20

Claim 5 defines a control unit, and claim 6 defines a structure, preferably an article of furniture constructed in accordance with the principle of the invention.

25

Examples of the preferred control for removing the ripple in the voltage as well as a couple of noise measurements will be described below with reference to the accompanying drawing. In the drawing:

Fig. 1 shows three different examples of power steps,

fig. 2 shows an example of a forward step,

30

fig. 3 shows a noise measurement performed on a lifting column with a

common power supply, and

fig. 4 shows a noise measurement on the same lifting column and power supply, but designed in accordance with the invention.

5

The first example is a Buck circuit, which may be expressed by  $V_{out} = V_{in} \cdot$  duty cycle. The corresponding forward step must be duty cycle =  $k/V_{in}$ . The result is then  $V_{out} = k$ .

10 The next example is a boost circuit, which may be expressed by  $V_{out} = V_{in}/\text{duty cycle}$ . The corresponding forward step must be duty cycle =  $V_{in}/k$ . The result is then again  $V_{out} = k$ .

15 The third example is a flyback circuit, which resembles the preceding one, but with the opposite sign  $V_{out} = -V_{in}/\text{duty cycle}$ . The same forward step as before may be used, viz. duty cycle =  $V_{in}/k$ , which gives  $V_{out} = -k$ .

20 Fig. 2 shows a forward step which may be used in connection with all three examples of power steps, with just a dimensional adaptation to the examples shown.

It will be appreciated that the invention is not limited to the mentioned circuits, and that other circuits fulfilling the function, as stated in the claims, are just as suitable.

25

To illustrate the effect of the invention, reference is made to the results of two noise measurements, where fig. 3 shows a noise measurement made on a lifting column having a common power supply, i.e. transformer, rectification and smoothing with capacitor (in the present case a lifting column having the designation DL1 and a control box having the designation CBD1  
30 of the make Linak A/S). Fig. 4 shows a noise measurement of the lifting

column and power supply, but designed in accordance with the invention (in the present case a lifting column having the designation DL1 and a control box CBD4 of the make Linak A/S). As will appear from the curves, there is a significant decline in the noise, totally from 57.0 dB(A) to 50.6 dB(A).

5

Although the invention has been explained in the foregoing with respect to articles of furniture in the broadest sense, the invention is not restricted to this, of course. In industrial and construction applications or applications in means of transportation there may also be a requirement for a low level of acoustic noise.

10



**Patent Claims:**

1. A drive unit, preferably an actuator comprising a DC motor having a rotor consisting of a plurality of coils connected to a commutator in connection with a set of brushes to establish a voltage across the coils, said DC motor, via a transmission, driving an adjustment means for adjusting an adjustable element in a structure in which the drive unit is incorporated, said drive unit being supplied with power from a power supply comprising a transformer having a primary side for connection to a mains voltage (alternating current) and a secondary side with rectification and smoothing for connection to the DC motor, characterized in that it comprises a first control to compensate for the loss in the motor, thereby keeping the speed thereof constant for a long period of time, as well as a second control adapted to remove the ripple in the voltage, thereby keeping the speed of the motor constant for a short period of time.
2. A drive unit according to claim 1, characterized in that the second control is performed by the following two steps, viz.
- a forward step in which the duty cycle may be expressed by  $k$  and  $V_{in}$ , and
- a power step in which  $V_{out}$  may be expressed by  $V_{in}$  and the duty cycle,
- wherein the result of the forward step and the power step is  $V_{out} = k$ ,
- and wherein  $V_{in}$  is the input voltage from the rectification,  $V_{out}$  is the output voltage from the power step,  $k$  is a constant given by the actual circuits for the forward step and the power step, and wherein the duty cycle is the proportional time for which the power supply may be loaded during a given period of time.

3. A power supply according to claim 2, characterized in that the forward step is given by: duty cycle =  $k/V_{in}$ , and the power step by:  $V_{out} = V_{in} \cdot$  duty cycle.

5 4. A power supply according to claim 2, characterized in that the forward step is given by: duty cycle =  $V_{in}/k$ , and the power step by:  $V_{out} = V_{in}/$ duty cycle.

10 5. A control unit for drive units, including actuators comprising a DC motor which, via a transmission, drives an adjustment means for adjusting an adjustable element in a structure in which the drive unit is incorporated, said drive unit being supplied with power from a power supply comprising a transformer having a primary side for connection to a mains voltage and a secondary side with rectification and smoothing for connection to the DC  
15 motor, characterized in that the control unit comprises a first control to compensate for the loss in the motor, thereby keeping the speed thereof constant for a long period of time, as well as a second control adapted to remove the ripple in the voltage, thereby keeping the speed of the motor constant for a short period of time.

20

2 6. A structure, in particular an article of furniture having at least an element which may be adjusted with at least a DC motor, preferably via a mechanical transmission, said DC motor being connected to a power supply comprising a transformer having a primary side for connection to a mains voltage and a secondary side with rectification and smoothing for connection to  
25 the DC motor, characterized in that the secondary side of the power supply is additionally provided with a first control to compensate for the loss in the motor, thereby keeping the speed thereof constant for a long period of time, as well as with a second control adapted to remove the  
30 ripple in the voltage, thereby keeping the speed of the motor constant for a short period of time.

Buck  $V_{out} = V_{in} \cdot \text{duty cycle}$

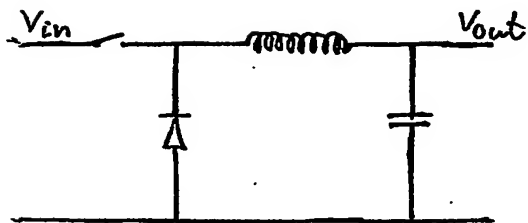


Fig 1a

Boost  $V_{out} = V_{in} \frac{1}{\text{duty cycle}}$

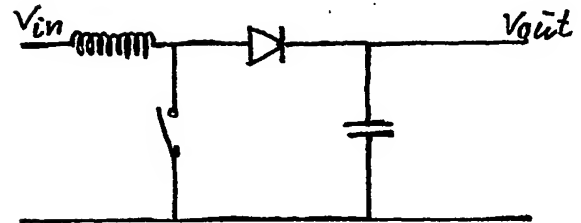


Fig 1b

Fly Back  $V_{out} = -V_{in} \frac{1}{\text{duty cycle}}$

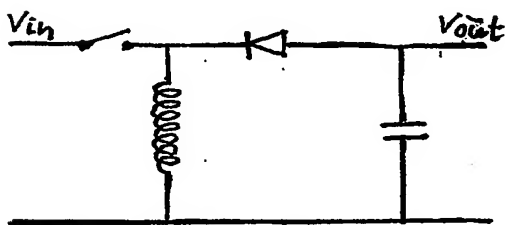


Fig. 1c

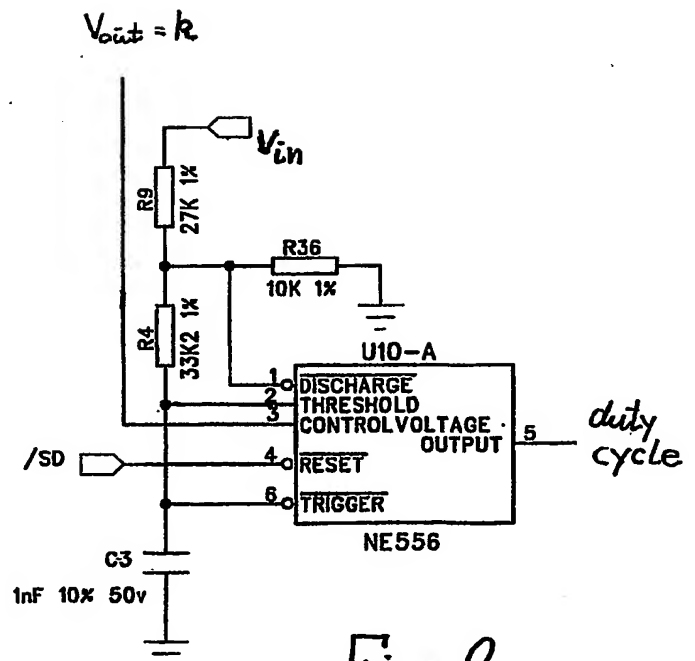


Fig. 3


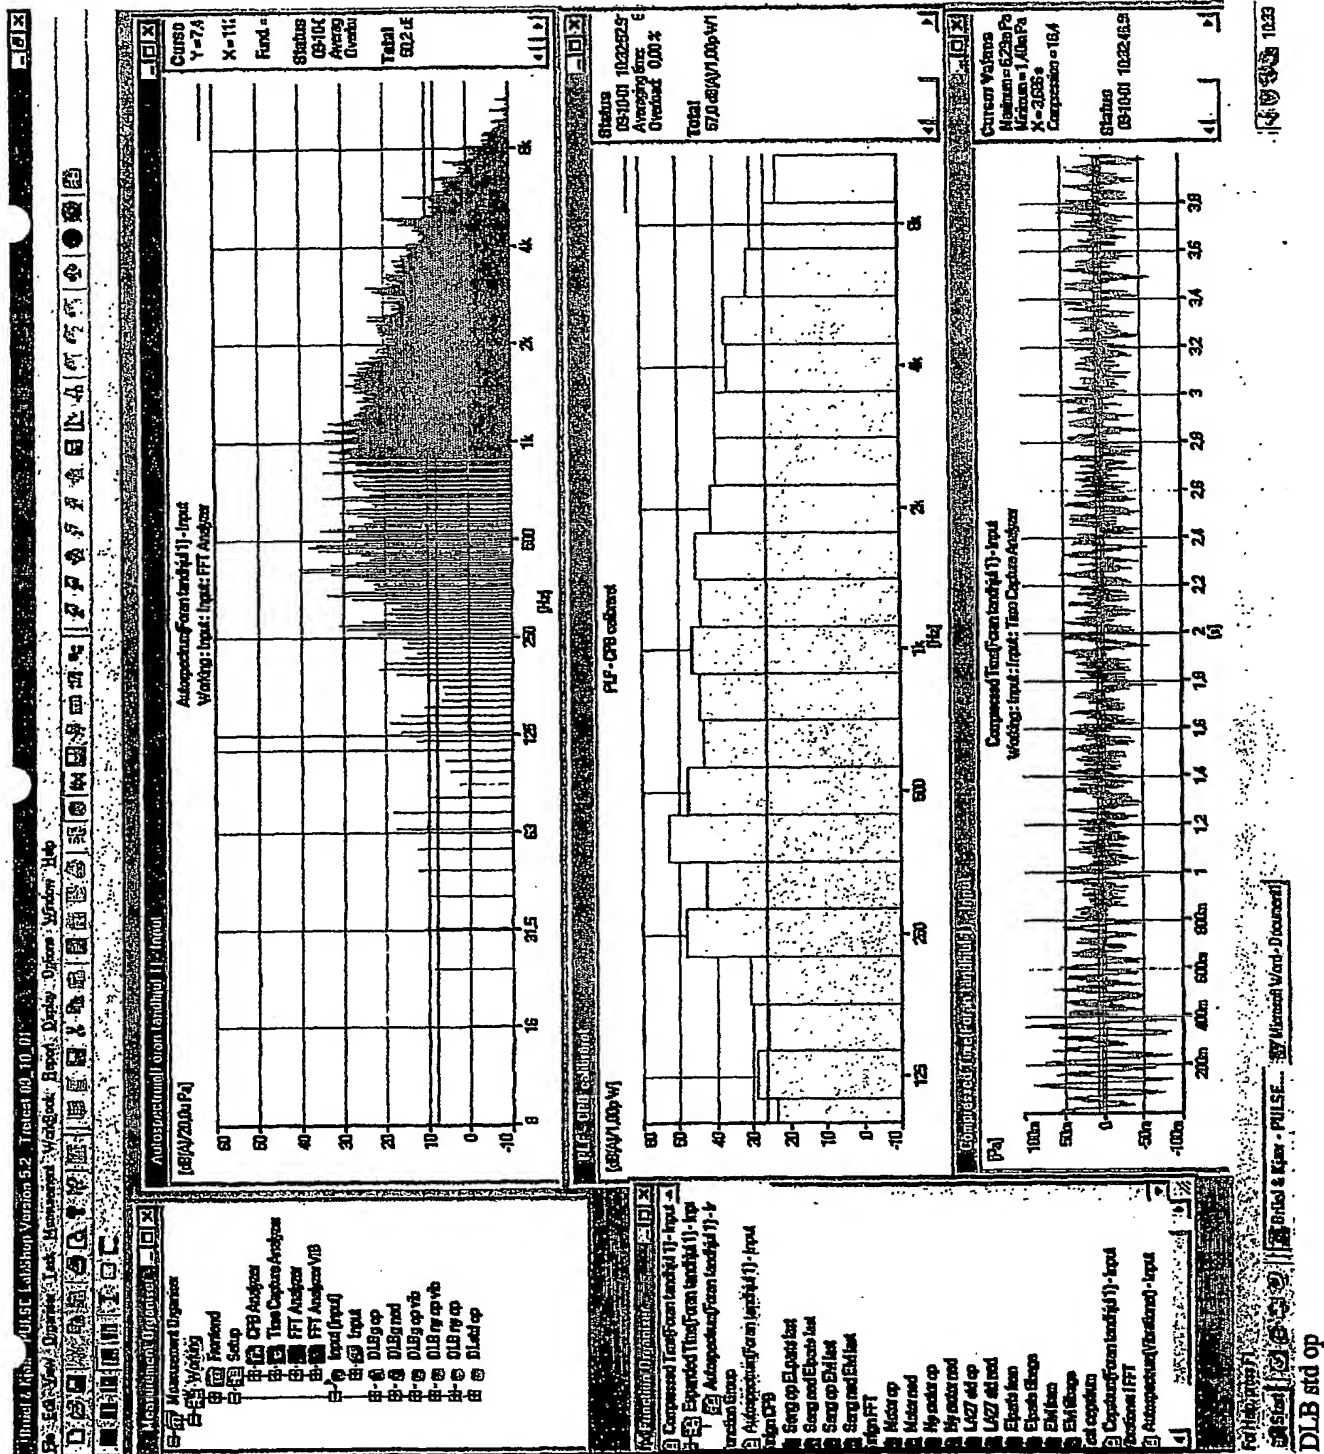


Fig. 4

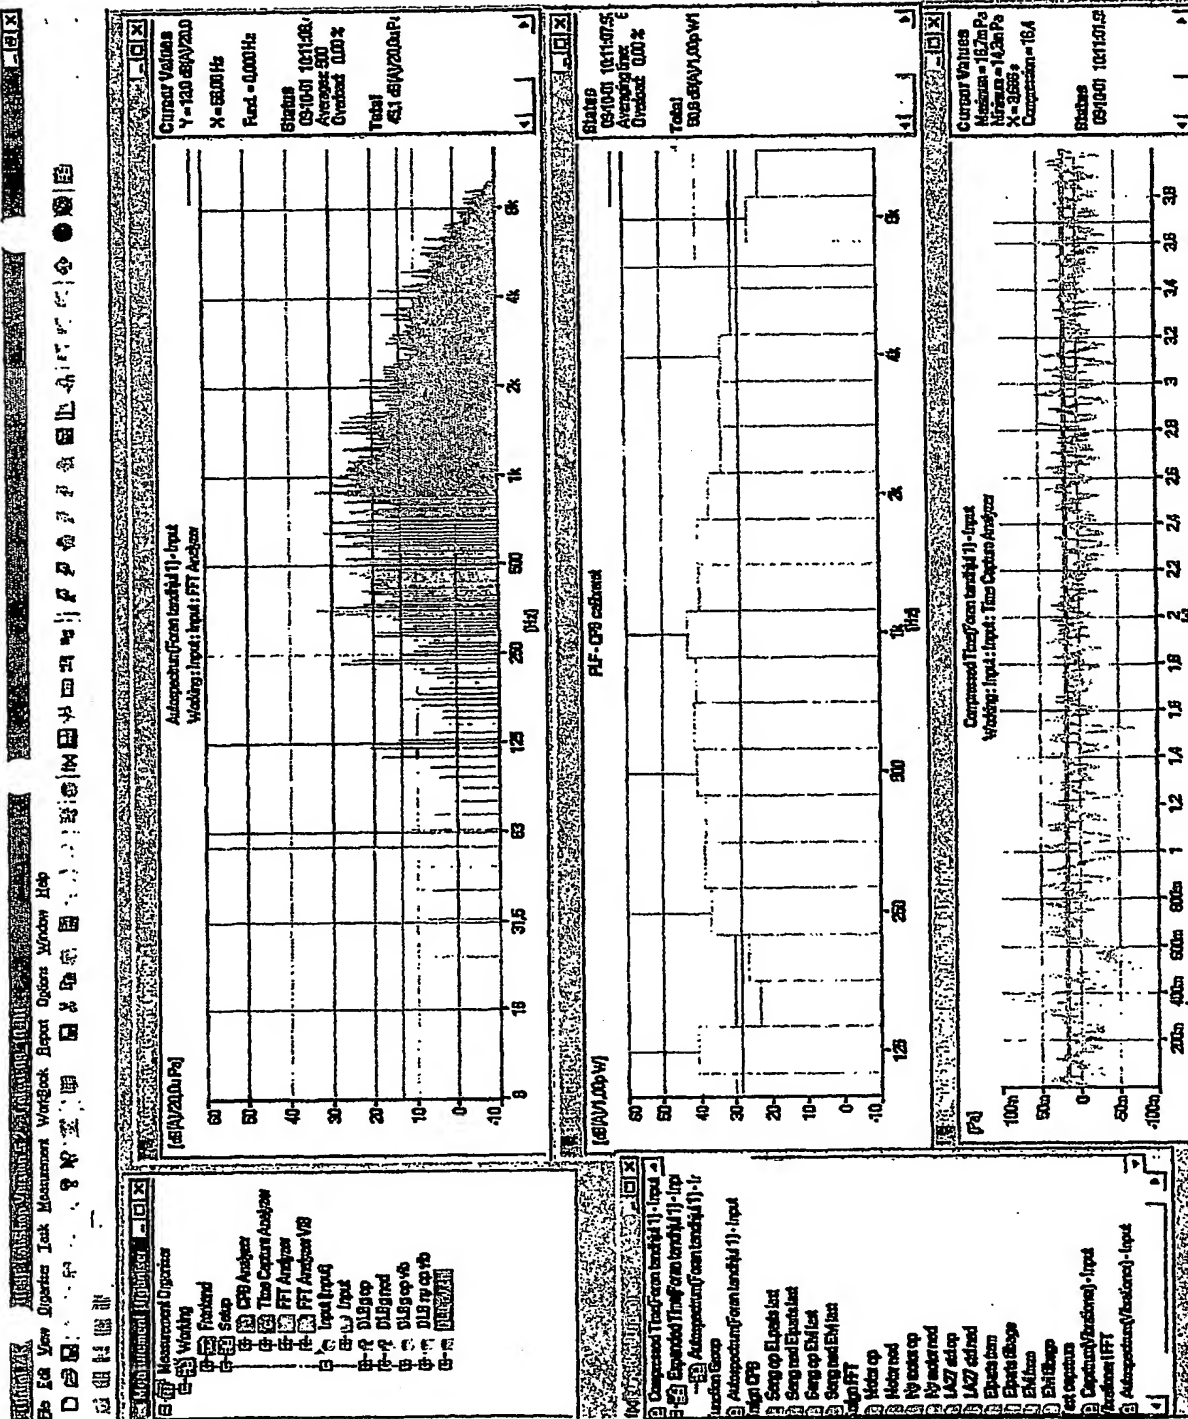

For High, press F1

File Edit View Options Task Measurement Workbook Report Options Window Help

DLB ny op

## INTERNATIONAL SEARCH REPORT

PCT/DK 03/00260

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 H02M1/15 G01F1/10

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
 IPC 7 H02M G01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 037 755 A (THOTTUVELIL VIJAYAN J ET AL) 14 March 2000 (2000-03-14) column 5, line 3 - column 6, line 52 abstract; figure 2	1-5
Y	---	6
Y	GB 2 207 565 A (SUNDSTRAND CORP) 1 February 1989 (1989-02-01) page 4, line 12 - line 15 abstract	1-5
Y	EP 1 079 511 A (LINAK AS) 28 February 2001 (2001-02-28) column 2, line 8 - line 14 abstract; figure 1 ---	1-6
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance  
 "E" earlier document but published on or after the international filing date  
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
 "O" document referring to an oral disclosure, use, exhibition or other means  
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 July 2003

Date of mailing of the international search report

08 AUG 2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax (+31-70) 340-3016

Authorized officer

JOHNNY SIMONSSON/JA A

## INTERNATIONAL SEARCH REPORT

PCT/DK 03/00260

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 508 664 A (LAMBDA ELECTRONICS INC) 14 October 1992 (1992-10-14) page 3, line 1 - line 58 abstract	1-6
A	EP 0 534 422 A (YAMAHA CORP) 31 March 1993 (1993-03-31) the whole document	1-6

## INTERNATIONAL SEARCH REPORT

PCT/DK 03/00260

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6037755	A	14-03-2000	NONE	
GB 2207565	A	01-02-1989	US 4736151 A FR 2609848 A1 JP 63190554 A	05-04-1988 22-07-1988 08-08-1988
EP 1079511	A	28-02-2001	EP 1079511 A1 US 2002030457 A1	28-02-2001 14-03-2002
EP 0508664	A	14-10-1992	US 5291382 A DE 69226300 D1 DE 69226300 T2 EP 0508664 A1 HK 1014806 A1 JP 5276751 A	01-03-1994 27-08-1998 15-04-1999 14-10-1992 14-07-2000 22-10-1993
EP 0534422	A	31-03-1993	JP 2522128 B2 JP 5091729 A DE 69223477 D1 DE 69223477 T2 EP 0534422 A2	07-08-1996 09-04-1993 22-01-1998 09-07-1998 31-03-1993